

BS700 (Surface Mounted)

Under Canopy Lighting

Before You Begin

Read and follow these instructions completely and carefully

▲ Warning

RISK OF ELECTRIC SHOCK

- . Turn off or disconnect input power before installation or servicing
- . Verify that supply voltage is correct by comparing it with the luminaire label information or product specification
- . Properly ground electrical enclosure

RISK OF FIRE/INJURY


- . Follow all NEC and local codes
- . Use only UL or IEC approved wire for input connections (minimum wire size 18 AWG)
- . Wear gloves and safety glasses at all times when performing installation or servicing

RISK OF PRODUCT DAMAGE


- Failure to follow instructions could result in damage to product and void ALL warranties!
- . DO NOT exceed fixtures maximum ambient temperature rating

Surface Mounted Installation


Carefully remove unit from packing box and inspect for defects before installation

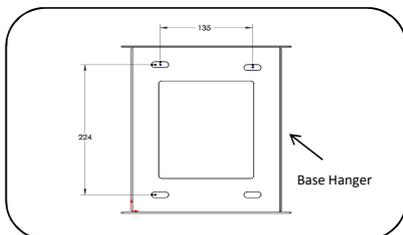


- 1 . Ensure canopy deck is sturdy and structurally sound to accept luminaire (each luminaire weights 6kg)

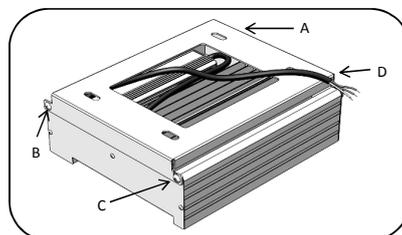


- 2 . Unpack luminaire from carton box
 . Loosen screw C & D
 . Unscrew & remove screw A & B

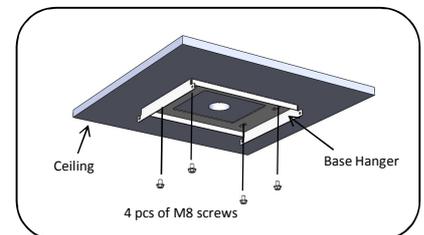


- 3 . Remove "Base Hanger" from luminaire
 . Using "Base Hanger" to perform screw holes marking
 . Using 4 screws to tighten "Base Hanger" onto ceiling

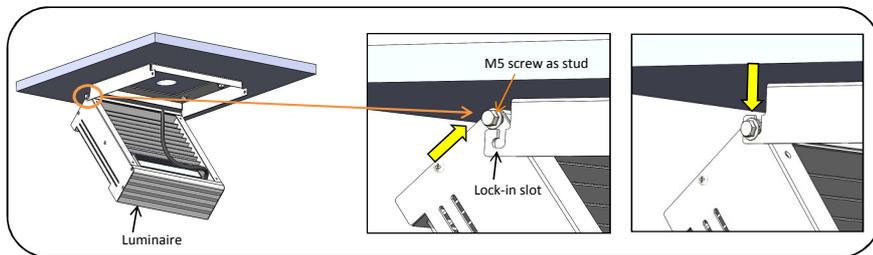


- 4 . Shift fixture until studs position at lock-in slots
 . Place studs into slots

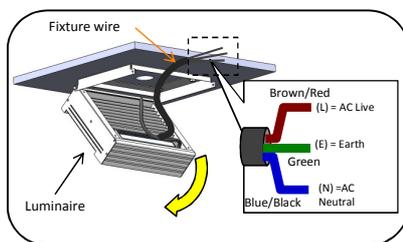

- 5 . Leave the fixture at swing down position
 . Connect AC wires to fixture wires

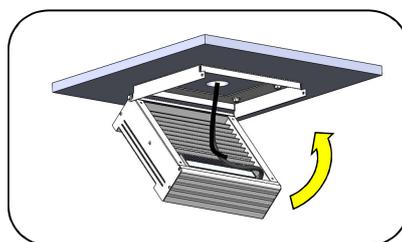

- 6 . Push excess wiring into the opening end
 . Swing upwards to attach luminaire to "Base Hanger"

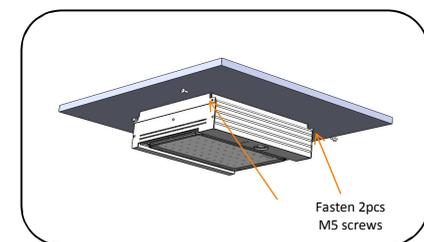

- 7 . Secure luminaire on "Base Hanger" by 2 screws

Troubleshooting

Symptom	Solution
Luminaire will not turn on	<ul style="list-style-type: none"> . Check wire connectors are properly connected . Verify input voltage is within specs. . Verify color of input wires match the color of the wires connected to