

NexusLED®
Simple is better

INDOOR LIGHTING
LED Greentube T8 Series

LED Greentube T8 Series

Greentube provides high quality light comparable to conventional fluorescent and delivers the immediate benefits of LED lighting technology. With its simple design, it is easy to install in any location.



Application areas

- Homes
- Offices
- Covered walkways
- Bathrooms
- Car parks
- Corridors
- Warehouse

Product Specifications

AC Input: 200 ~ 240Vac

Usage: 12 hours a day

System Power: 18W +/-5%

LED Lumen Maintenance: LM80

Color Rendering Index (CRI): >80

Electrical Safety: Class II

Operating Temperature: -20°C ~ +40°C

Compliant: CE

Storage Temperature: -20°C ~ +80°C


IP Rating: IP20

Lifetime (typical): 40,000 hours at ta 25°C

Luminaire Material: Frosted Polycarbonate

Model	RS-PVN-4FT-18W-CW-PC	RS-PV-4FT-18W-CW-PC
Luminous Flux (Hot Lumens)	1,800lm	2,300lm
Luminous Efficacy	>100 lm/W	>120 lm/W
Colour Temperature	6500K (available 3000K, 4000K)	6500K
Beam Angle	180°	300°

Dimensions

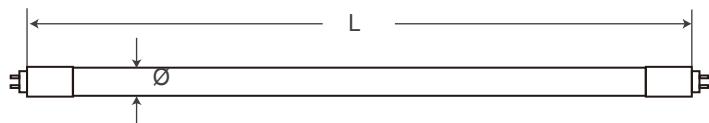

Ø	L	Weight
26mm	1198mm	250g

No. 32-40, Jalan Sri Sulong Selatan, Taman Perindustrian Sri Sulong, 83000 Batu Pahat, Johor, Malaysia
Tel: +607-4102 159 Fax: +607-4102 206

© 2025 NexusLED Green Technology Sdn. Bhd. All rights reserved. NexusLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by NexusLED. All trademarks are owned by NexusLED Green Technology Sdn. Bhd. or their respective owners.

Revision 250309



For More Information
Please Scan The QR Code
Or visit www.nexusled.com