



## TiTi-RGB LED

TiTi-RGB with Luxeon LEDs offer optimum visual conditions while enabling maximum energy saving for Talo Light.

### Benefits

- Better visibility at night.
- Easy installation.
- Minimum maintenance.

### Features

- Without secondary optics for maximum light output.
- Selectable power option.
- Long useful life up to 50,000Hrs.
- Various light color selection.

### Application

- Buildings
- Roof Top



## General Specification :

DC Input	24Vdc $\pm$ 3%
LED Driving Current	500mA each color
Light Color	RGB
Wavelength : RED	620 ~ 630nm
BLUE	460 ~ 475nm
GREEN	520 ~ 535nm
Beam Angle	10 x 35°
Operating Temperature	-30 ~ 50° C
Storage Temperature	-10 ~ 90° C
Lifetime (typ.)	50,000Hrs at Ta 40° C
Heatsink Material	Aluminium Extruded
Luminaire Cover Material	Clear PC
LED Lumen Maintenance	LM80
Casing Color	Silver
IP rating	IP66


## Detail Specification :

Model	Length	Total LED	Power
TiTi-RGB-066-1035	1050mm	12leds each color	66W
TiTi-RGB-033-1035	550mm	6leds each color	33W

Note :

Contact us for detail technical information and others beam angle requirements.

## Product Dimension :

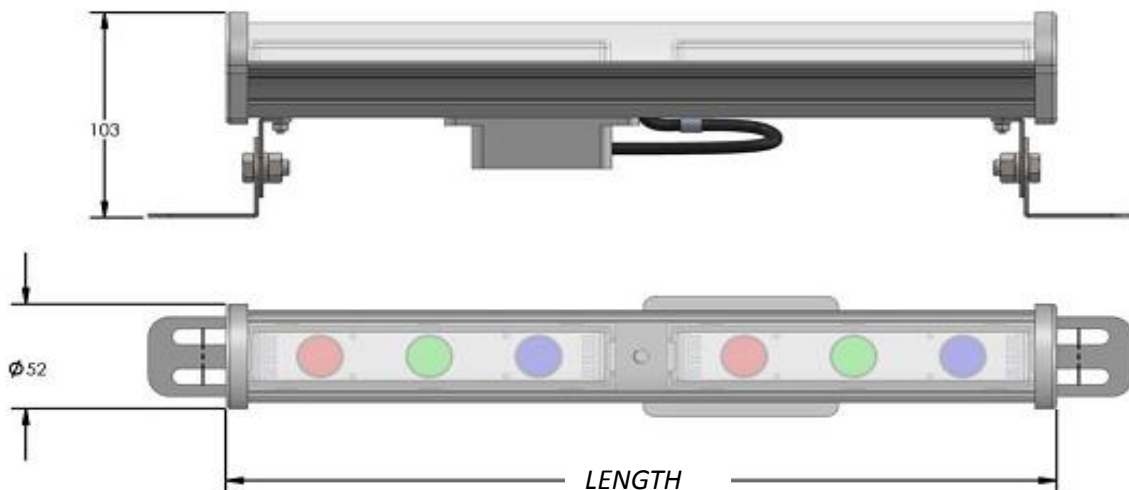

Model Structure Name :

